


PREVIDIA-C200SG

Inim

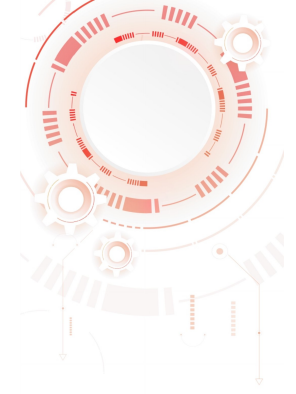

- Compact analog addressable control panel, capable of managing 2 loops of 240 points.
 - Multiprotocol, manages the Inim, Apollo and Argus security protocols in the loop.
 - Integrated 1.5A power supply.
 - Integrated 7Ah battery charger.
 - Robust metal cabinet with plastic front plate.
 - Terminals for HORNET + network connection with other control panels or remote keyboards integrated on board.
 - On-board Ethernet connection for remote management, networking between control panels or connection to BMS software supervision, MODBUS over TCP-IP protocol available.
 - USB port for configuration.
 - Management of a micro SD card for the visualization of topographic maps, saving and recovery of configurations, storage of the event log.
 - 4 integrated I/O channels configurable as 1A supervised power outputs, supervised inputs.
 - Integrated configurable relay.
 - 4.3" color LCD graphic touch screen.
 - Silicone function keys for basic functions.
 - 30 multicolored LEDs included (depending on the model) to signal the status of the 30 zones, or configurable.
 - Management of a gas extinguishing channel (depending on the model) certified EN12094-1.
-